

TAPPI A SFIATO CONTROLLATO

CAPS WITH CONTROLLED BREATHER

**CODICE
CODE**

118-005

CARATTERISTICHE TECNICHE:

Valore di depressione (nella fase di aspirazione) bar 0,04-0,06.
Valore di pressione (in fase di scarico) bar 0,1-0,2.
Questi valori si riferiscono ad una variazione di volume dentro il serbatoio di circa 300 litri di liquido al minuto primo.

CAMPI DI IMPIEGO:

Serbatoi di olio, benzina, gasolio.

UTILITA'

Non ispira impurità, non sfiata liquido, non dà luogo a condensa di acqua nei serbatoi, riduce l'ossidazione dei liquidi e nel caso di serbatoi di benzina, evita le perdite per evaporazione.

TECHNICAL FEATURES:

Vacuum value (during suction phase) bar 0,04-0,06. Pressure value (during unloading phase) bar 0,1-0,2. These values are referred to a volume change within the tank of 300 lt. about/minute.


USE FIELDS:

Oil, fuel, petrol tanks.


USEFULNESS

It doesn't intake impurities, it does not leak liquid, it does not give rise to water condensate in the tanks. It reduces the oxidation of the liquid and in case of petrol tanks it avoids leakage to evaporation.


118-005-00078 TAPPO SFIATO PER OLIO CON CARTUCCIA FILTRANTE STANDARD - TIPO A SALDARE OIL BREATHER CAP WITH STANDARD FILTERING CARTRIDGE - WELD TYPE

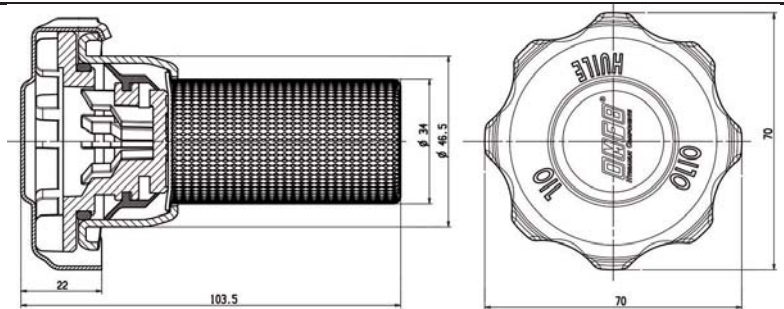

118-005-00112 TAPPO SFIATO PER CARBURANTE - TIPO A SALDARE FUEL BREATHER CAP - WELD TYPE

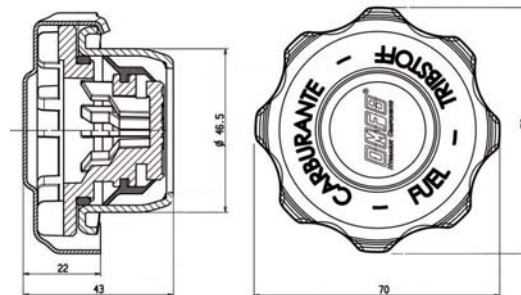


118-005-00096 TAPPO SFIATO PER OLIO CON CARTUCCIA FILTRANTE STANDARD - TIPO FLANGIATO OIL BREATHER CAP WITH STANDARD FILTERING CARTRIDGE - FLANGED TYPE

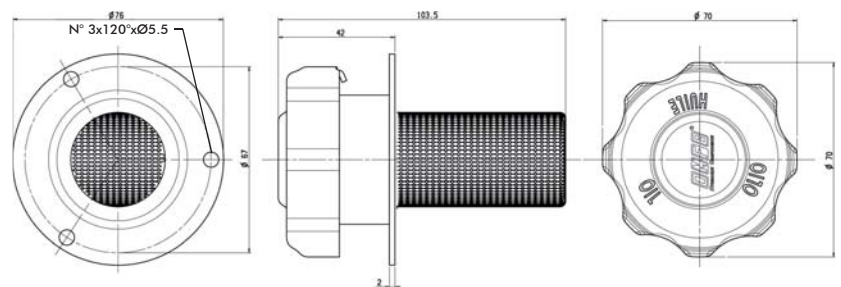

Data: Veneedi 09 novembre 2012

Codice foglio: 997-118-00505 Rev://



UNI ISO 1219/1


pag.1

OMFB
HYDRAULIC COMPONENTS


O.M.F.B. Hydraulic Components
We reserve the right to make any changes without notice.
Edition 2012.10 No reproduction, however partial, is permitted.
Via Cave, 7/9 25050 Provaglio d'Iseo (Brescia) Italy
Tel.: +39.030.9830611 Fax: +39.030.9839207-208
Internet: www.omfb.it e-mail: info@omfb.it

COMPANY WITH
QUALITY SYSTEM
CERTIFIED BY DNV
= ISO 9001 =

118-005-00121 TAPPO SFIATO PER OLIO CON CARTUCCIA FILTRANTE STANDARD E ASTA LIVELLO - TIPO A SALDARE
OIL BREATHER CAP WITH STANDARD FILTERING CARTRIDGE AND LEVEL ROD - WELD TYPE

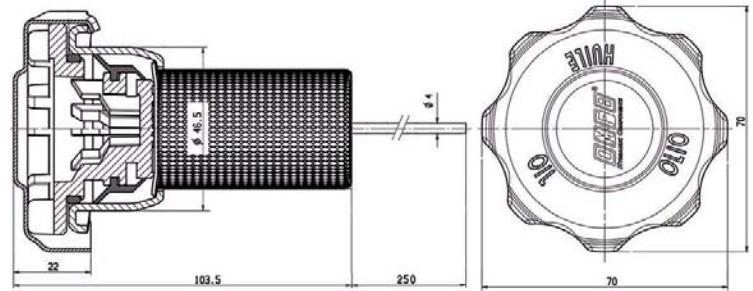

118-005-00130 TAPPO SFIATO PER OLIO CON CARTUCCIA FILTRANTE STANDARD E ASTA LIVELLO - TIPO FLANGIATO
OIL BREATHER CAP WITH STANDARD FILTERING CARTRIDGE AND LEVEL ROD - FLANGED TYPE

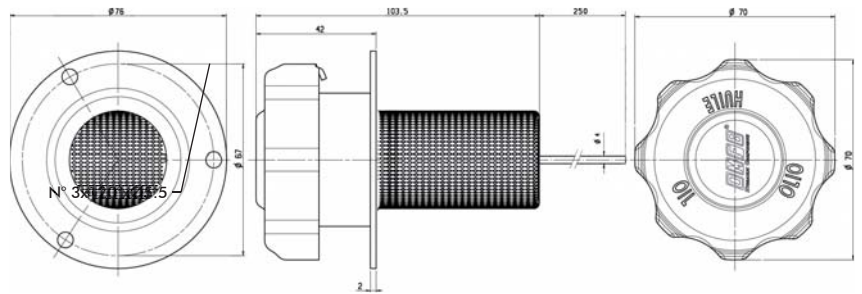

ACCESSORI - ACCESSORIES



118-006-00031
CARTUCCIA FILTRANTE STANDARD
STANDARD FILTERING CARTRIDGE



118-006-00059
CALOTTA A SALDARE
WELDING COVER



118-006-00077
CALOTTA FLANGIATA CON OR
FLANGED COVER WITH OR



118-006-00068
CARTUCCIA FILTRANTE
CON ASTA LIVELLO
FILTERING CARTRIDGE
WITH LEVEL ROD



118-006-00102
TAPPO PER OLIO
OIL CAP



118-006-00120
TAPPO PER CARBURANTE
FUEL CAP